
Zubehör/Accessory :

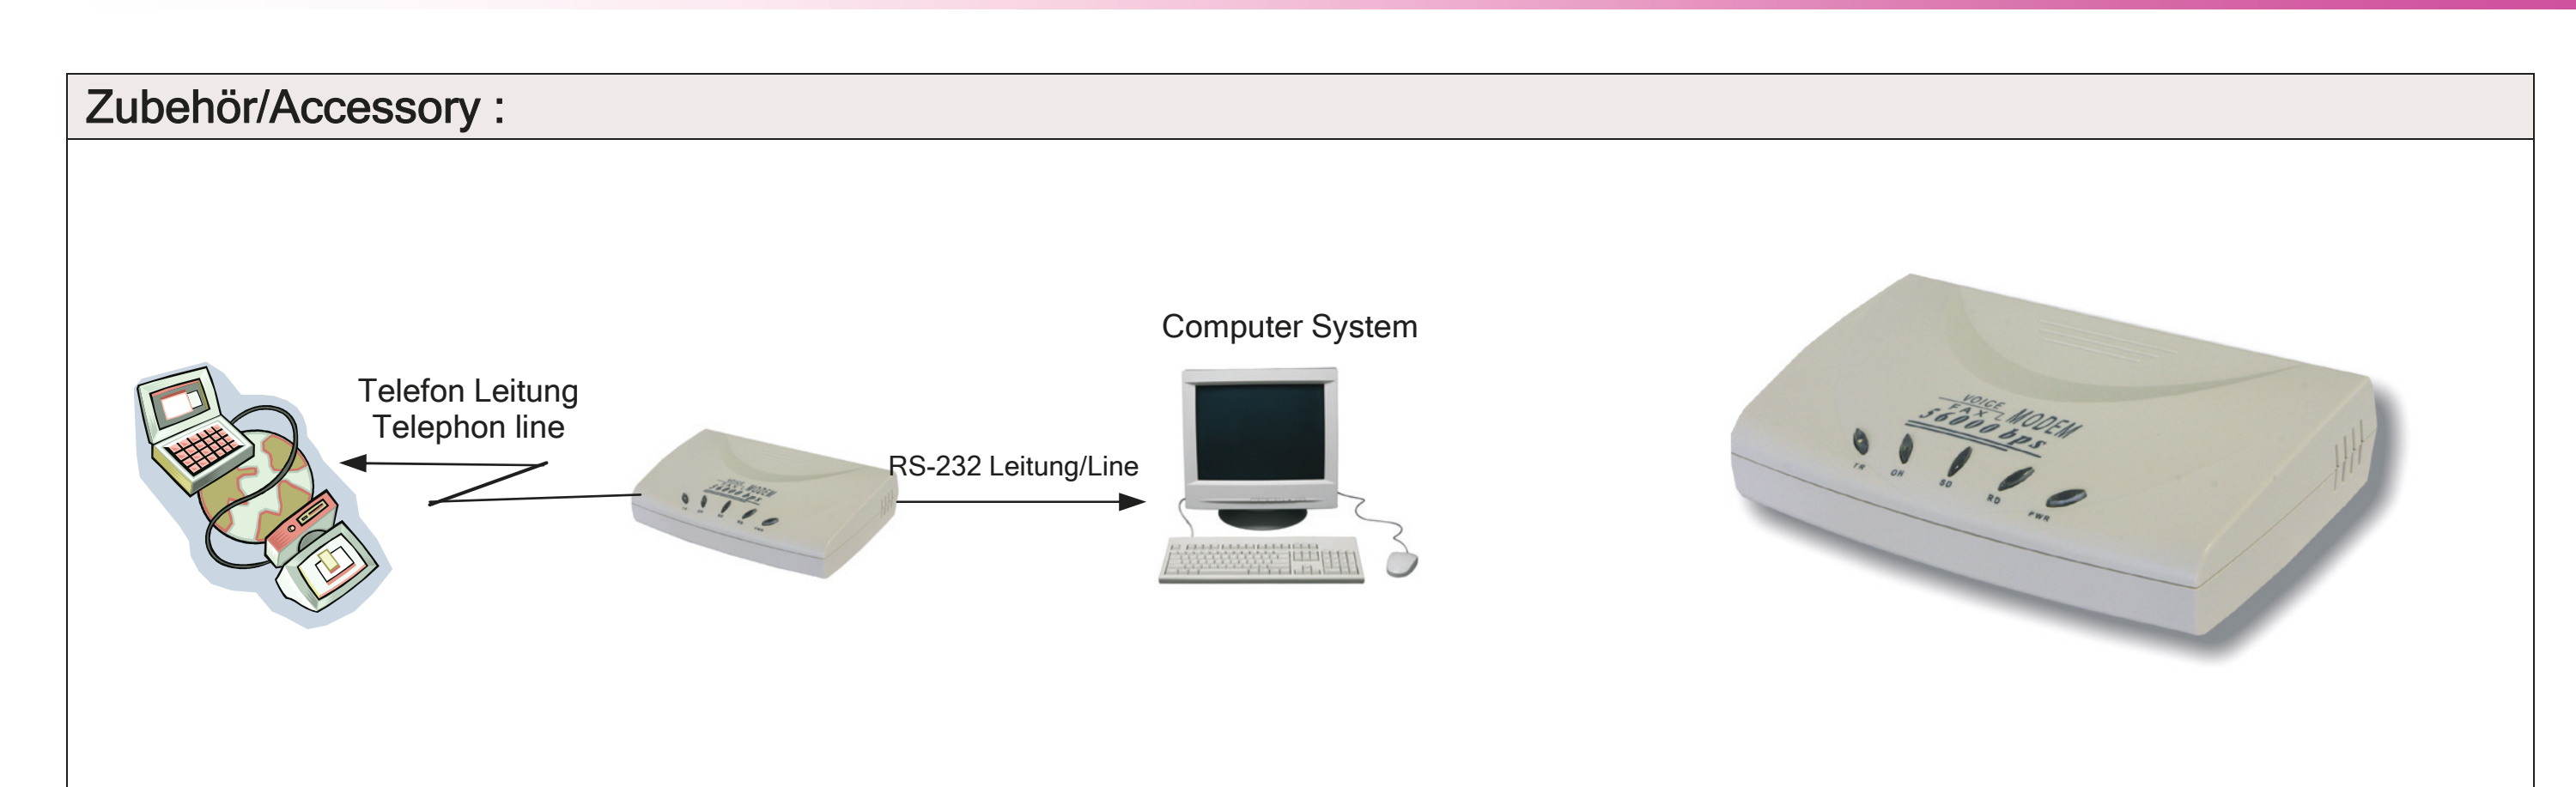

Operating System (OS):	Geprüft/Approved:	Verpackung/Packing:
   		

Externes V.92/56K Fax/Modem

Beschreibung :	• Die EX-8302 ermöglicht Ihnen eine Verbindung zwischen einer analogen Telefonleitung und dem Rechner herzustellen. Bei dem Rechner wird die RS-232 benötigt.
Merkmale :	• Externe Fax V.92/56K Fax/Modem **Daten Mode** • Kommunikation Standard: ITU-T V.90, K56FLEX, V.34, V.32bis, V.32, V.23, V.22bis, V.21, Bell212A, Bell 103 • Daten Verdichtung: ITU-T V.44, V.42bis/MNP 5 • Fehler Behebung: ITU-T V.42/MNP 2-4 **FAX Mode** • Protokolle: ITU-T V.17, V.29, V.27 ter, V21 Ch2, Group 3, Class1, 14'400 Kbps **Voice Mode** • Telefonbeantworter (TAM), DTMF Erkennung & Erzeugung, Sprachaufnahme und Abspielung **Video Mode** • H.324, V.80 (Video Konferenz Protokoll)
Chip-Set:	• Conexant
Datentransfer-Rate :	• Download bis 56Kbps und Upload bis 48 Kbps
Anschlüsse :	• 1 x RS-232 9 Pin D-SUB Buchse, 2 x RJ11 • Mikrofon und Lautsprecher Anschluss
Betriebstemperatur : Luftfeuchtigkeit :	• 0 bis 60^{0}C • 5 bis 95%
Abmessung / Gewicht :	• 134 x 85 x 28 mm / 165g
Lieferumfang :	• EX-8302, 1 x Seriell Kabel 9 Pin Stecker auf 9 Pin Buchse, 1 x RJ11 Telefon Kabel, Netzteil, Treiber CD, Handbuch

External V.92/56K Fax/Modem

Description:	• The EX-8302 fax modem connects to PC via RS232 Cable. The EX-8302 uses advanced Conexant chipset solution that provides complete system design featuring Voice/Data/Fax modem for 56K Internet access. There offers easy installation and cost-effective connection for SOHO and residential users.
Feature :	• External Fax V.92/56K Fax/Modem **Data Mode** • Communication standard: ITU-T V.90, K56FLEX, V.34, V.32bis, V.32, V.23, V.22bis, V.21, Bell212A, Bell 103 • Data Compression: ITU-T V.44, V.42bis/MNP 5 • Error Correction: ITU-T V.42/MNP 2-4 **FAX Mode** • Protocol: ITU-T V.17, V.29, V.27 ter, V21 Ch2, Group 3, Class1, 14'400 Kbps **Voice Mode** • Telephone Answering Machine (TAM), DTMF detection & generation, Sound recording and playing **Video Mode** • H.324, V.80 (Video Conference Protocol)
Connectors :	• 1 x RS-232 9 pin D-SUB female, 2 x RJ11 • Microphone and Speaker connector
Operating Temperature : Humidity :	• 0 to 60^{0}C • 5 to 95%
Size / Weight :	• 134 x 85 x 28 mm / 165g
Packaging contents :	• EX-8302, 1 x Serial cable 9 pin male to 9 pin female, 1 x RJ11 telephone cable, Power Supply, Driver CD, Manual